



PRECISMECA



75 Mason Street  
Wallaceburg, ON, CANADA  
N8A-4L7


# STANDARD SEALING SYSTEM

PHONE: (519) 627-2277  
FAX: (519) 627-5115  
TOLL FREE: (800) 661-4065

November 4, '10


As we know, Precismeca / Rulmecca introduced the PSV sealing system in North America about 2 years ago. The PSV, has been in use throughout Europe & Asia for decades & is now our **“Standard”** sealing system.

**PRECISMECA ORIGINAL**  
(50mm shaft, 60mm shaft)  
(Available in - Cema XHDE, XXHDE)

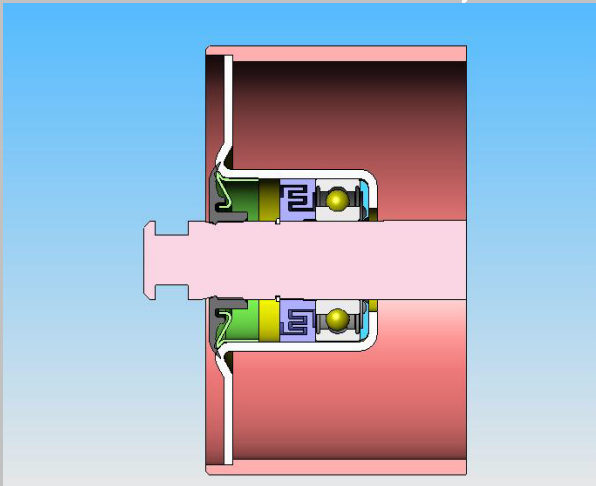

- Precismeca Original will continue in the, XHDE, and XXHDE sizes.
- Larger outer seal (rubber - hermetic) over the end cap, provides an excellent initial guard against debris from entering the bearing housing.
- Triple labyrinth and precision inner seal placement provides trouble free secondary sealing for both sides of the greased-for-life ball bearing.

**PRECISMECA *STANDARD***  
(shafts - 25mm, 30mm, 40mm)  
(Available in - Cema C, D, E, F)

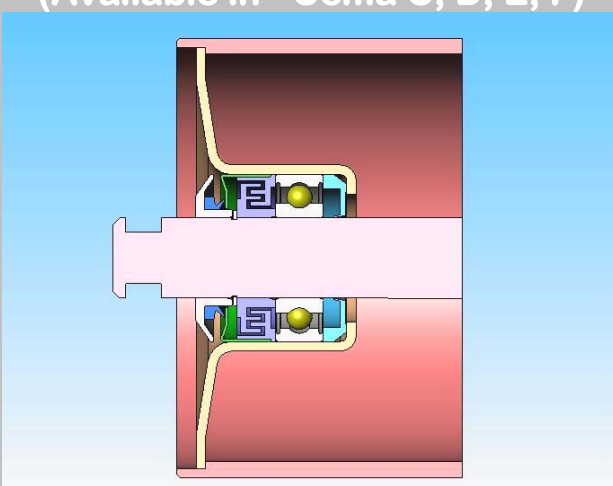

- Precismeca standard is the new “Standard” sealing system & will continue to be provided on all Cema C, Cema D, Cema E, and Cema F orders.
- “Standard” design provides less vibration with lower starting and rotational resistance.
- Rock Guard covers the rubber v-ring. The shape of this outer seal working with the shape of the bearing housing and rock guard proportions allows for the seal to become tighter when high pressure water or air is introduced to the roll end.
- Triple labyrinth remains and an even deeper positioned inner seal placement allows for a larger greased area.

The feed back we’ve received from End Users have been very positive...  
**“Excellent Bearing Protection / Good Compatibility to Competitors Frames / Competitive Price / Nice Roll”**